



Barred Kennel Door

Description

This style of door maximises air flow and uses 10mm stainless steel round bar. The door is fitted with anti-pooling cross braces which prevent water from sitting.

Door frames and bodies are manufactured out of 304 grade stainless steel.

All doors are supplied with a three-sided frame for Health & Safety reasons, so that there is no lower horizontal bar to cause a trip hazard. Doors are also fitted with a safety release latch that prevents staff members from becoming trapped.

The doors can be specified with a wide variety of options including closing trim panels, ventilation panels, door restraining straps, high security locks, budget locks and magnetic latches and locks (no safety release).

Doors are provided complete with frames, hinges and safety release latch as standard. The standard size is 780mm wide by 2000mm high, however any size can be specified to suit individual requirements.

Bar spacing is set out to avoid entrapment issues and is compliant with the latest DEFRA standards making it suitable for boarding kennels. Standard lift off hinges are provided but rising butt hinges can be specified as an option.

If the barred door is used as part of a suite of walk in kennels, locks can be keyed alike for convenience.



Correct at time of going to press - Stellvet reserves the right to change the specification

STELLVET CONTACT DETAILS

Phone: 01670 760082

Website: www.stellex.com

Email: sales@stellex.com



Anti-pooling Brace



Safety Release Latch



Optional Magnetic Latch



Features and Benefits

Feature

- 304 grade stainless steel construction
- Satin brushed finish
- 30mm box section construction
- Safety release latch
- 10mm SS round bars
- Anti-pooling brace
- Three-sided frame

Benefit

- High levels of corrosion resistance
- Offers a smooth easy to clean surface
- Very strong and durable
- Avoids staff being trapped
- Strong and easy to clean
- Stops water pooling
- Avoids trip hazard

Options

- Custom versions available
- Custom sizes available
- High security locks
- Budget locks
- Magnetic latches
- Door restraining straps
- Closing trims

Technical Data

Physical Sizes

Size


- Height (mm) 2000
- Width (mm) 780

Aperture Size

- Height (mm) 2010
- Width (mm) 790

Fixing Method

4 x 12mm diameter holes
(2 per side) in vertical frame
uprights

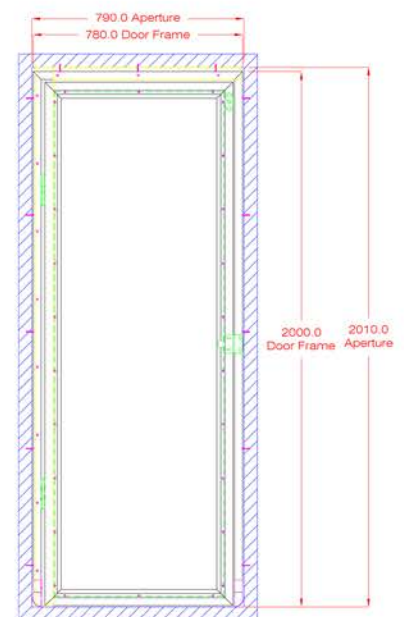

Correct at time of going to press - Stellvet reserves the right to change the specification

STELLVET CONTACT DETAILS

Phone: 01670 760082

Website: www.stellvet.com

Email: sales@stellvet.com