



Solid Walk in Kennel Door

Description

This style of door has no central horizontal transom. The door is fitted with solid Trespa High Pressure laminate.

This panel can be ventilated if required.

The Trespa panel is fixed in place using the Stellvet glazing system which allows for easy replacement unlike bonded in systems.

Door frames and bodies are manufactured out of 304 grade stainless steel with a brushed finish. Trespa panels are supplied in white as standard but with a range of colours available as options.

All doors are supplied with a three-sided frame for Health & Safety reasons, so that there is no lower horizontal bar to cause a trip hazard. Doors are also fitted with a safety release latch that prevents staff members from becoming trapped.

The doors can be specified with a wide variety of options including closing trim panels, ventilation panels, door restraining straps, door retaining hooks, rising butt hinges and magnetic latches and locks (no safety release).

Doors are provided complete with frames, hinges and safety release latch as standard. The standard size is 780mm wide by 2000mm high, however any size can be specified to suit individual requirements.

This type of door is ideally suited to being used as a connecting door between two walk in kennels (to allow for a much larger run if required). In this location, patient interaction is highly undesirable and standard walk in kennel doors are completely unsuitable.



Correct at time of going to press - Stellvet reserves the right to change the specification

STELLVET CONTACT DETAILS

Phone: 01670 760082

Website: www.stellvet.com

Email: sales@stellvet.com



Trespa Panel



Optional Magnetic Latch



Stellvet Glazing System



Features and Benefits

Feature

- 304 grade stainless steel construction
- Satin brushed finish
- 30mm box section construction
- Safety release latch
- Stellvet glazing system
- Trespa panel
- Three-sided frame

Benefit

- High levels of corrosion resistance
- Offers a smooth easy to clean surface
- Very strong and durable
- Avoids staff being trapped
- Allows panels to be quickly replaced
- Provides strong, hygienic and safe accommodation
- Avoids trip hazard

Options

- Custom sizes available
- Ventilation holes
- Magnetic latches
- Door restraining straps
- Closing trims
- Door tie back
- Rising butt hinges

Technical Data

Physical Sizes

Size


- Height (mm) 2000
- Width (mm) 780

Aperture Size

- Height (mm) 2010
- Width (mm) 790

Fixing Method

4 x 12mm diameter holes
(2 per side) in vertical frame
uprights

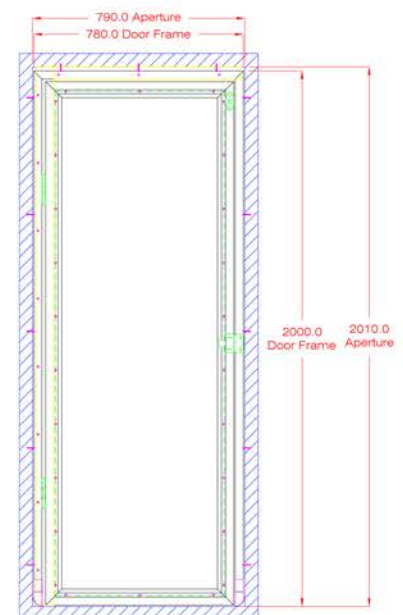

Correct at time of going to press - Stellvet reserves the right to change the specification

STELLVET CONTACT DETAILS

Phone: 01670 760082

Website: www.stellex.com

Email: sales@stellex.com